


YSP 210 SB-2DW/AG



Insert bearings are based on sealed deep groove ball bearings. This variant is suitable for applications with both constant and alternating directions of rotation, heavy loads and/or high speeds. It has an inner ring extended on both sides and uses NR ConCentra locking technology, enabling quick and easy mounting onto the shaft.

- Quick and easy to mount onto the shaft
- Long service life
- Reduce noise and vibration levels

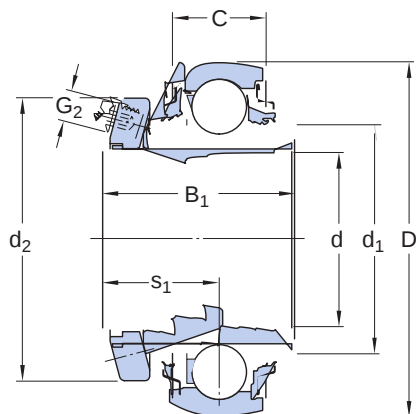

Dimensions

d	51.66 mm	Bore diameter
d	50 mm	Bore diameter of sleeve
D	90 mm	Outside diameter
B ₁	46.2 mm	Overall bearing width
B	37 mm	Width of inner ring
C	22 mm	Width of outer ring
d ₁	≈ 62.51 mm	Outside diameter of inner ring
d ₂	72 mm	Outside diameter of locking collar
s ₁	27.7 mm	Distance from locking device side face to raceway centre

Values specified for B₁ and s₁ are approximate and before the set screw is tightened (sleeve and inner ring bore at starting position).

Calculation data

Basic dynamic load rating	C	35.1 kN
Basic static load rating	C ₀	23.2 kN
Fatigue load limit	P _u	0.98 kN

Limiting speed		800 r/min
Calculation factor	f_0	14

Mounting information

Set screw	G_2	M6
Hexagonal key size for set screw	N	3.05 mm
Recommended tightening torque for set screw		7.4 N·m

Associated products

Rubber seating ring		RIS 210 A
---------------------	--	-----------

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table 1, table 2
- Radial internal clearance: Standard inner ring, Other bearings

BEARING INTERFACES

- Shaft tolerances