


YSP 208 SB-2DW/AG



Insert bearings are based on sealed deep groove ball bearings. This variant is suitable for applications with both constant and alternating directions of rotation, heavy loads and/or high speeds. It has an inner ring extended on both sides and uses NR ConCentra locking technology, enabling quick and easy mounting onto the shaft.

- Quick and easy to mount onto the shaft
- Long service life
- Reduce noise and vibration levels

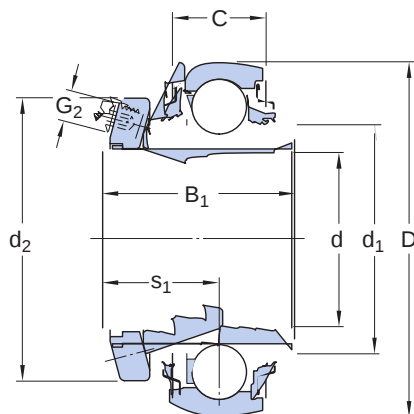

Dimensions

d	41.66 mm	Bore diameter
d	40 mm	Bore diameter of sleeve
D	80 mm	Outside diameter
B ₁	43.1 mm	Overall bearing width
B	33.9 mm	Width of inner ring
C	21 mm	Width of outer ring
d ₁	≈ 51.8 mm	Outside diameter of inner ring
d ₂	62 mm	Outside diameter of locking collar
s ₁	26.2 mm	Distance from locking device side face to raceway centre

Values specified for B₁ and s₁ are approximate and before the set screw is tightened (sleeve and inner ring bore at starting position).

Calculation data

Basic dynamic load rating	C	30.7 kN
Basic static load rating	C ₀	19 kN
Fatigue load limit	P _u	0.8 kN

Limiting speed		950 r/min
Calculation factor	f_0	14

Mounting information

Set screw	G_2	M6
Hexagonal key size for set screw	N	3.05 mm
Recommended tightening torque for set screw		7.4 N·m

Associated products

Rubber seating ring		RIS 208 A
---------------------	--	-----------

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table 1, table 2
- Radial internal clearance: Standard inner ring, Other bearings

BEARING INTERFACES

- Shaft tolerances