


YSP 207 SB-2DW/AG



Insert bearings are based on sealed deep groove ball bearings. This variant is suitable for applications with both constant and alternating directions of rotation, heavy loads and/or high speeds. It has an inner ring extended on both sides and uses NR ConCentra locking technology, enabling quick and easy mounting onto the shaft.

- Quick and easy to mount onto the shaft
- Long service life
- Reduce noise and vibration levels

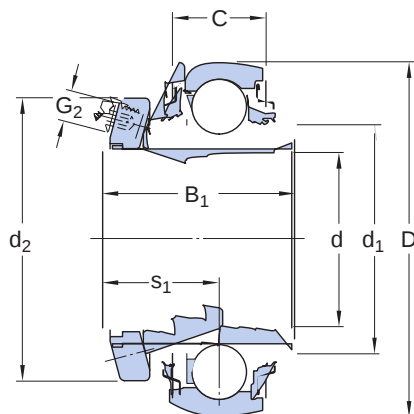

Dimensions

d	36.66 mm	Bore diameter
d	35 mm	Bore diameter of sleeve
D	72 mm	Outside diameter
B ₁	39.7 mm	Overall bearing width
B	30.5 mm	Width of inner ring
C	19 mm	Width of outer ring
d ₁	≈ 46.1 mm	Outside diameter of inner ring
d ₂	57 mm	Outside diameter of locking collar
s ₁	24.5 mm	Distance from locking device side face to raceway centre

Values specified for B₁ and s₁ are approximate and before the set screw is tightened (sleeve and inner ring bore at starting position).

Calculation data

Basic dynamic load rating	C	25.5 kN
Basic static load rating	C ₀	15.3 kN
Fatigue load limit	P _u	0.655 kN

Limiting speed	1 100 r/min
----------------	-------------

Calculation factor	f_0	14
--------------------	-------	----

Mounting information

Set screw	G_2	M6
-----------	-------	----

Hexagonal key size for set screw	N	3.05 mm
----------------------------------	---	---------

Recommended tightening torque for set screw	7.4 N·m
---	---------

Associated products

Rubber seating ring	RIS 207 A
---------------------	-----------

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table 1, table 2
- Radial internal clearance: Standard inner ring, Other bearings

BEARING INTERFACES

- Shaft tolerances