


BA1B 311576




These single row angular contact ball bearings can accommodate radial and axial loads acting simultaneously, where the axial load acts in one direction only. They can operate at high speeds and, depending on the variant, even very high speeds. They are more suitable than deep groove ball bearings for supporting large axial forces acting in one direction.

- High-speed capability
- Accommodate relatively high radial loads and large unilateral axial loads

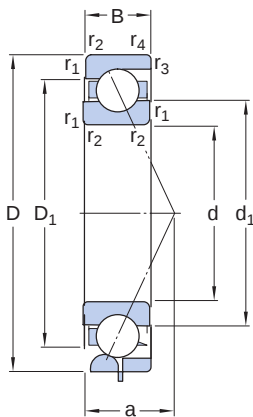

Dimensions		
d	762 mm	Bore diameter
D	889 mm	Outside diameter
B	63.5 mm	Width
d ₁	≈ 804 mm	Shoulder diameter of inner ring (large side face)
D ₁	≈ 848 mm	Shoulder diameter of outer ring (large side face)
a	271 mm	Distance side face to pressure point
r _{1,2}	min. 2.1 mm	Chamfer dimension
r _{3,4}	min. 2.1 mm	Chamfer dimension

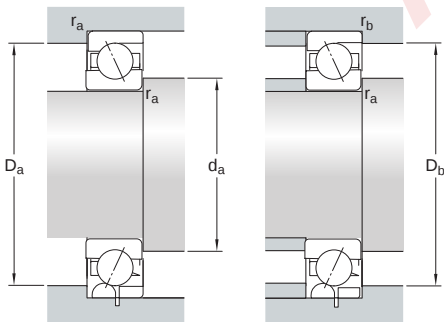

Abutment dimensions		
d _a	min. 773 mm	Diameter of shaft abutment
D _a	max. 878 mm	Abutment diameter housing
D _b	max. 878 mm	Diameter of housing abutment
r _a	max. 2 mm	Radius of fillet
r _b	max. 2 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	449 kN
Basic static load rating	C ₀	1 270 kN
Fatigue load limit	P _u	18.6 kN
Reference speed		560 r/min
Limiting speed		600 r/min
Minimum axial load factor	A	11.5
Minimum radial load factor	k _r	0.079
Limiting value	e	0.8

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (), P6, P5, Normal (inch)
- Internal clearance: CA+CB+CC, G
- Preload: GA+GB+GC

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit