


71984 BM




These single row angular contact ball bearings can accommodate radial and axial loads acting simultaneously, where the axial load acts in one direction only. They can operate at high speeds and, depending on the variant, even very high speeds. They are more suitable than deep groove ball bearings for supporting large axial forces acting in one direction.

- High-speed capability
- Accommodate relatively high radial loads and large unilateral axial loads

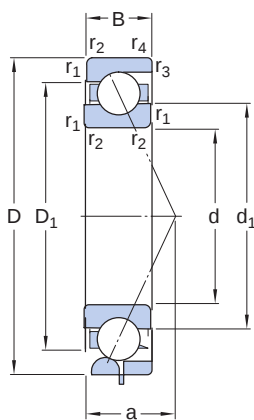

Dimensions		
d	420 mm	Bore diameter
D	560 mm	Outside diameter
B	65 mm	Width
d ₁	≈ 472 mm	Shoulder diameter of inner ring (large side face)
D ₁	≈ 507 mm	Shoulder diameter of outer ring (large side face)
a	238 mm	Distance side face to pressure point
r _{1,2}	min. 4 mm	Chamfer dimension
r _{3,4}	min. 1.5 mm	Chamfer dimension

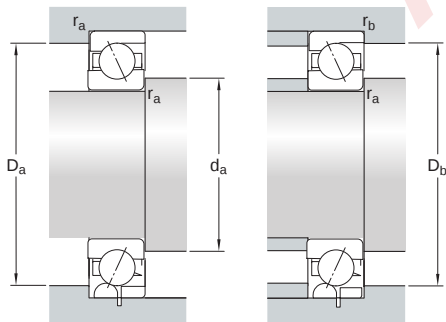

Abutment dimensions		
d _a	min. 435 mm	Diameter of shaft abutment
D _a	max. 545 mm	Abutment diameter housing
D _b	max. 553 mm	Diameter of housing abutment
r _a	max. 3 mm	Radius of fillet
r _b	max. 1.5 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	364 kN
Basic static load rating	C ₀	670 kN
Fatigue load limit	P _u	13.7 kN
Reference speed		1 100 r/min
Limiting speed		1 100 r/min
Minimum axial load factor	A	7.93
Minimum radial load factor	k _r	0.085
Limiting value	e	1.14

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (), P6, P5, Normal (inch)
- Internal clearance: CA+CB+CC, G
- Preload: GA+GB+GC

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit