

466953




These single row angular contact ball bearings can accommodate radial and axial loads acting simultaneously, where the axial load acts in one direction only. They can operate at high speeds and, depending on the variant, even very high speeds. They are more suitable than deep groove ball bearings for supporting large axial forces acting in one direction.

- High-speed capability
- Accommodate relatively high radial loads and large unilateral axial loads



Dimensions		
d	380 mm	Bore diameter
D	520 mm	Outside diameter
B	65 mm	Width
d ₁	≈ 435 mm	Shoulder diameter of inner ring (large side face)
d ₂	≈ 411 mm	Shoulder diameter of inner ring (small side face)
D ₁	≈ 465 mm	Shoulder diameter of outer ring (large side face)
a	222 mm	Distance side face to pressure point
r _{1,2}	min. 4 mm	Chamfer dimension
r _{3,4}	min. 1 mm	Chamfer dimension

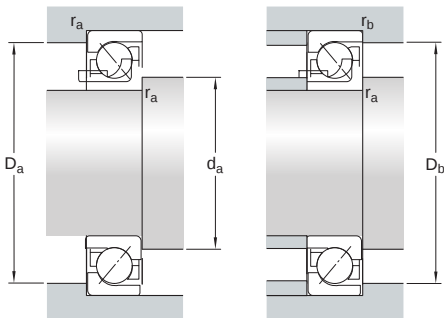

Abutment dimensions		
d _a	min. 395 mm	Diameter of shaft abutment
D _a	max. 505 mm	Abutment diameter housing
D _b	max. 514 mm	Diameter of housing abutment
r _a	max. 3 mm	Radius of fillet
r _b	max. 1 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	345 kN
Basic static load rating	C ₀	610 kN
Fatigue load limit	P _u	12.9 kN
Reference speed		1 200 r/min
Limiting speed		1 200 r/min
Minimum axial load factor	A	6.56
Minimum radial load factor	k _r	0.081
Limiting value	e	1.14

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (), P6, P5, Normal (inch)
- Internal clearance: CA+CB+CC, G
- Preload: GA+GB+GC

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit