


BD1B 351890 A


Single direction thrust ball bearings can accommodate axial loads in one direction. They must not be subjected to any radial load. Their separable components facilitate mounting/dismounting and maintenance inspections. Many of the components are interchangeable. The shaft washers have a ground bore that enables an interference fit.



- Separable design facilitates mounting/dismounting and maintenance inspections
- Interchangeable components
- Ground bore of shaft washers enable interference fit

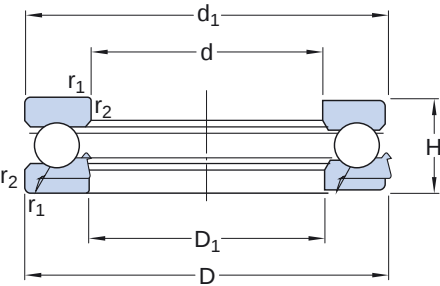

Dimensions		
d	1 380 mm	Bore diameter
D	1 535 mm	Outside diameter shaft washer (inner ring of thrust bearing)
H	130 mm	Height
d ₁	≈ 1 535 mm	Outside diameter shaft washer
D ₁	≈ 1 385 mm	Inner diameter housing washer
r _{1,2}	min. 5 mm	Chamfer dimension washer

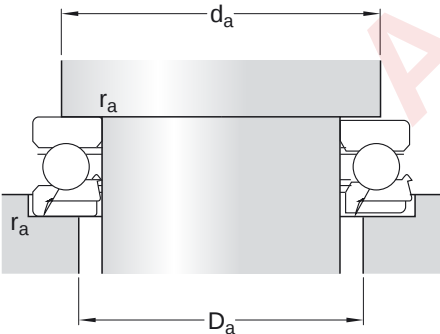

Abutment dimensions		
da	min. 1 475 mm	Abutment diameter shaft
Da	max. 1 445 mm	Abutment diameter housing
ra	max. 4 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	1 330 kN
Basic static load rating	C ₀	16 300 kN
Fatigue load limit	P _u	156 kN
Reference speed		240 r/min
Limiting speed		340 r/min
Minimum load factor	A	1 400

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table 1

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit