


Radial contact ball bearings with seals or shields are designed to accommodate radial loads and some axial loads in either direction. One bearing series is based on a single cross section which remains constant as the bore diameter increases, leading to significant space and weight savings. The integral sealing can significantly prolong bearing service life because it keeps lubricant in the bearings and contaminants out. The bearings are available with inch and metric boundary dimensions.

- Accommodate radial and some axial loads in both directions
- Integral sealing prolongs bearing service life
- Thin cross section
- Lightweight
- Low friction
- High stiffness
- High running accuracy

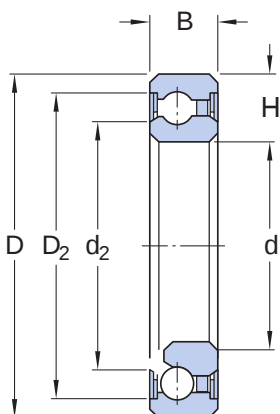

Dimensions		
d	152.4 mm	Bore diameter
D	165.1 mm	Outside diameter
H	6.35 mm	Radial cross section
B	6.35 mm	Width
d_2	≈ 156.159 mm	Recess diameter inner ring
D_2	≈ 161.442 mm	Recess diameter outer ring
	3.175 mm	Ball diameter
	0.635 mm	Maximum radius of shaft or housing fillet

Dynamic load rating, Kaydon, radial direction

C_K 3.2 kN

Basic static load rating, radial direction

 $C_0 \quad 8.45 \text{ kN}$

Starting torque max. no load	0.367 N·m
Limiting speed	1 160 r/min

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances, radial clearance and recommended fits:
 - Endurakote bearings: Class 1, Class 1, Class 3, Class 4
 - bearings: Class 1
 - other bearings: Class 1, Class 1, Class 3, Class 4, Class 6
- Materials

AGA BEARINGS