


C 2212 V



CARB toroidal roller bearings are unique: as well as accommodating misalignment without increased stress levels, they also provide frictionless axial movement within the bearing in the non-locating position in self-aligning bearing arrangements. This full complement bearing, which has a lower speed rating, uses as many rollers as possible, giving it the highest possible load rating.

- Accommodate misalignment and axial displacement within the bearing
- Very high radial load carrying capacity
- Provide frictionless axial movement
- Long bearing system life

Bore type	Cylindrical	
	Dimensions	
	d	60 mm Bore diameter
	D	110 mm Outside diameter
	B	28 mm Width
	d ₂	≈ 77.1 mm Shoulder diameter of inner ring
	D ₁	≈ 97.9 mm Shoulder or recess diameter of outer ring
	s ₁	max. 8.5 mm Permissible axial displacement
	s ₂	max. 5.3 mm Permissible axial displacement
	r _{1,2}	min. 1.5 mm Chamfer dimension

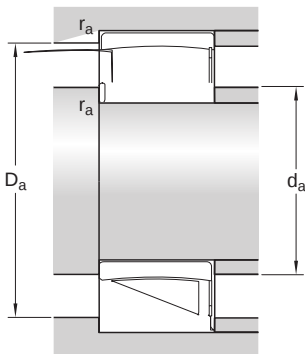

Abutment dimensions		
d _a	min. 69 mm	Diameter of shaft abutment
d _a	max. 91 mm	Diameter of shaft abutment
D _a	max. 101 mm	Abutment diameter housing
r _a	max. 1.5 mm	Radius of fillet

Calculation data

AGA performance class		AGA Explorer
Basic dynamic load rating	C	166 kN
Basic static load rating	C ₀	190 kN
Fatigue load limit	P _u	22.4 kN
Limiting speed		2 800 r/min
Misalignment factor	k ₁	0.1
Internal clearance factor	k ₂	0.123

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P5, tapered bore 1:12, tapered bore 1:30
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit