

C 2211 TN9

CARB toroidal roller bearings are unique: as well as accommodating misalignment without increased stress levels, they also provide frictionless axial movement within the bearing in the non-locating position in self-aligning bearing arrangements. Being NR Explorer bearings, they can accommodate higher load levels and provide significantly extended service life.




- Accommodate misalignment and axial displacement within the bearing
- High radial load carrying capacity
- Provide frictionless axial movement
- Long bearing system life
- Reduce noise and vibration levels

Bore type

Cylindrical



Dimensions		
d	55 mm	Bore diameter
D	100 mm	Outside diameter
B	25 mm	Width
d ₂	≈ 65.8 mm	Shoulder diameter of inner ring
D ₁	≈ 86.7 mm	Shoulder or recess diameter of outer ring
s ₁	max. 8.6 mm	Permissible axial displacement
r _{1,2}	min. 1.5 mm	Chamfer dimension

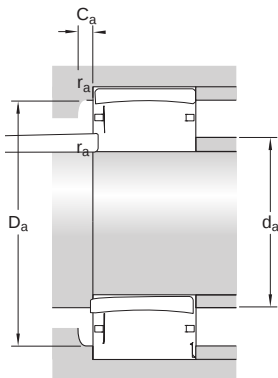

Abutment dimensions		
d _a	min. 64 mm	Diameter of shaft abutment
d _a	max. 65.8 mm	Diameter of shaft abutment
D _a	min. 83.1 mm	Diameter of housing abutment
D _a	max. 91 mm	Abutment diameter housing

C_a	min. 0.3 mm	Minimum width of space required in housing
r_a	max. 1.5 mm	Radius of fillet
A negative value for C_a is theoretical.		

Calculation data

AGA performance class	AGA Explorer	
Basic dynamic load rating	C	116 kN
Basic static load rating	C_0	114 kN
Fatigue load limit	P_u	13.4 kN
Reference speed		6 300 r/min
Limiting speed		9 000 r/min
Misalignment factor	k_1	0.094
Internal clearance factor	k_2	0.133

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P5, tapered bore 1:12, tapered bore 1:30
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit