

C 4126-2CS5V/C3GEM9


CARB toroidal roller bearings are unique: as well as accommodating misalignment without increased stress levels, they also provide frictionless axial movement within the bearing in the non-locating position in self-aligning bearing arrangements. This bearing has a lower speed rating and is sealed to minimize the need for lubrication and extend service life.



- Accommodate misalignment and axial displacement within the bearing
- High radial load carrying capacity
- Provide frictionless axial movement
- Long bearing system life
- Sealed for increased reliability


Bore type

Cylindrical

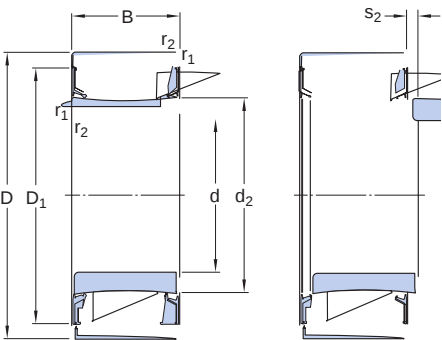

Dimensions

d	130 mm	Bore diameter
D	210 mm	Outside diameter
B	80 mm	Width
d ₂	≈ 153 mm	Shoulder diameter of inner ring
D ₁	≈ 191 mm	Shoulder or recess diameter of outer ring
S ₂	max. 7.5 mm	Permissible axial displacement
r _{1,2}	min. 2 mm	Chamfer dimension

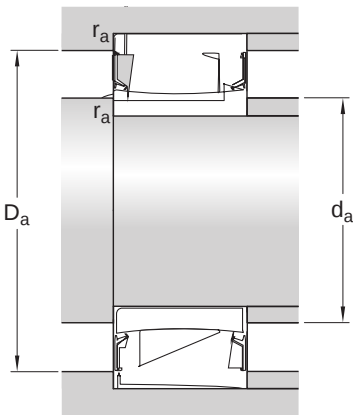

Abutment dimensions

d _a	min. 141 mm	Diameter of shaft abutment
d _a	max. 153 mm	Diameter of shaft abutment
D _a	min. 155 mm	Diameter of housing abutment
D _a	max. 199 mm	Abutment diameter housing
r _a	max. 2 mm	Radius of fillet

Calculation data

AGA performance class		AGA Explorer
Basic dynamic load rating	C	750 kN
Basic static load rating	C ₀	1 100 kN
Fatigue load limit	P _u	110 kN
Limiting speed		70 r/min
Misalignment factor	k ₁	0.09
Internal clearance factor	k ₂	0.126

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P5, tapered bore 1:12, tapered bore 1:30
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit