


NK 10/12 TN


Single row needle roller bearings without an inner ring consist of an outer ring with a needle roller and cage assembly. They are an excellent choice for compact bearing arrangements in applications where hardened and ground raceways can be provided on the shaft. The outer ring includes two non-separable closure rings that act as flanges to guide the bearing axially.



- High radial load carrying capacity
- High stiffness
- Low cross-sectional height
- Accommodate axial displacement in both directions

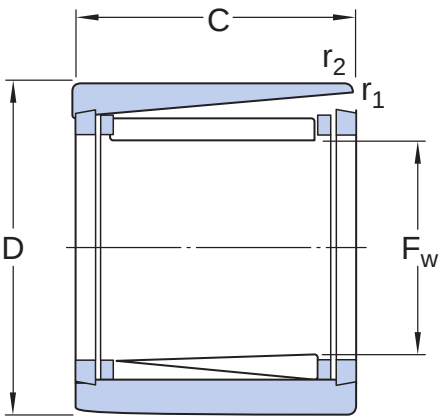

Dimensions		
F _w	10 mm	Diameter under rollers
D	17 mm	Outside diameter
C	12 mm	Width
r _{1,2}	min. 0.3 mm	Chamfer dimension outer ring

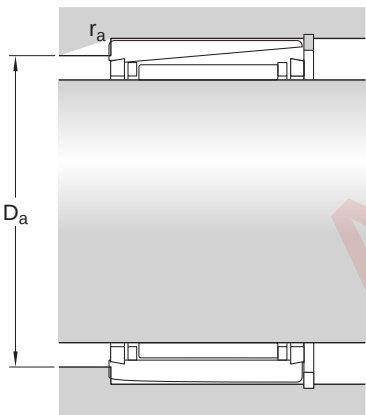


Abutment dimensions		
D _a	max. 15 mm	Diameter of housing abutment
r _a	max. 0.3 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	4.57 kN
Basic static load rating	C ₀	5.7 kN

Fatigue load limit	P_u	0.63 kN
Reference speed		28 000 r/min
Limiting speed		32 000 r/min

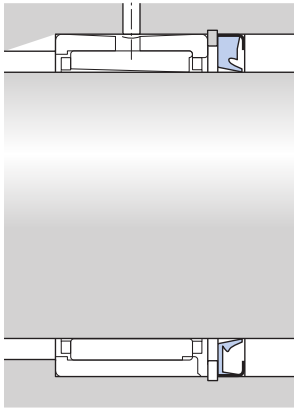

Associated seals

G 10x17x3

Radial shaft seal
 with a low cross-
 sectional height,
 single lip

SD 10x17x3

Radial shaft seal
 with a low cross-
 sectional height,
 double lip

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6, P5, ISO - F6 (F_w)
- Radial internal clearance: table

DESIGN CONSIDERATIONS

- Housing tolerances: table
- Shaft tolerances: Operating clearance