


BK 2016



Drawn cup needle roller bearings are typically used in applications where the housing bore cannot be used as a raceway for a needle roller and cage assembly, but where a very compact and economical bearing arrangement is required. Owing to the large number of rollers, the bearings have a high load carrying capacity and stiffness. The closed end makes them suitable for bearing arrangements where they are situated at the end of a shaft.

- High radial load carrying capacity
- Accommodate small axial guidance forces
- High stiffness
- Very low cross-sectional height

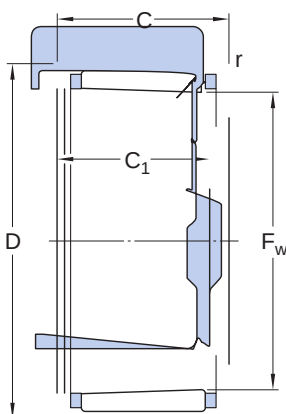

Dimensions

F_w	20 mm	Diameter under rollers
D	26 mm	Outside diameter
C	16 mm	Width
C_1	min. 13.3 mm	Depth of the drawn cup BK
r	min. 0.8 mm	Chamfer dimension drawn cup (outer ring)

Calculation data

Basic dynamic load rating	C	12.3 kN
Basic static load rating	C_0	20.4 kN
Fatigue load limit	P_u	2.36 kN
Reference speed		12 000 r/min
Limiting speed		14 000 r/min

Associated products

Inner ring IR series	IR 17x20x16.5
----------------------	---------------

Inner ring LR series	LR 17x20x16.5
Radial shaft seal with a low cross-sectional height, single lip	G 20x26x4
Radial shaft seal with a low cross-sectional height, double lip	SD 20x26x4

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table

DESIGN CONSIDERATIONS

- Shaft and housing tolerances: table

AGA BEARINGS