



294/670 EM

Spherical roller thrust bearings accommodate very heavy axial and considerable radial loads. They have the highest load rating of all thrust bearings, enabling compact, high power density bearing arrangements. By combining two or more spherical roller thrust bearings, it is possible to create a bearing arrangement that is either self-aligning, allowing misalignment of the shaft, or very stiff.

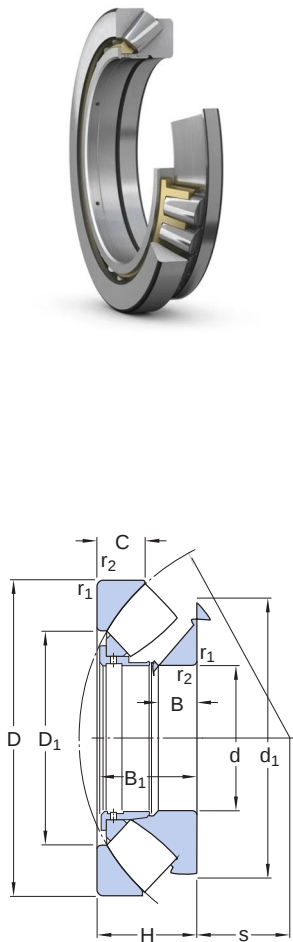

- High load carrying capacity
- Can accommodate combined loads
- Allow misalignment or create very stiff bearing arrangements
- Long service life and low friction
- Separable design

Dimensions		
d	670 mm	Bore diameter
D	1 150 mm	Outside diameter
H	290 mm	Height
d ₁	≈ 1 045 mm	Outside diameter of shaft washer end side face
D ₁	≈ 864 mm	Shoulder diameter outer ring
B	110 mm	Width shaft washer or length of shaft washer bore diameter that fits on shaft (bearings with a machined cage)
B ₁	280 mm	Height shaft washer + cage
C	141 mm	Height housing washer
s	387 mm	Distance from shaft washer end side face to pressure point
r _{1,2}	min. 15 mm	Chamfer dimension shaft washer

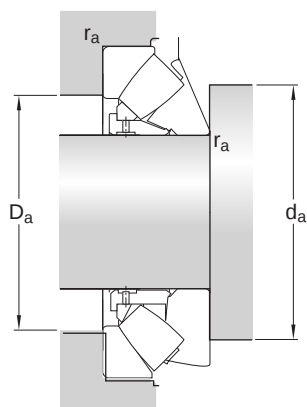

Abutment dimensions

d_a	min. 905 mm	Diameter of shaft abutment
D_a	max. 1 000 mm	Diameter of housing abutment
r_a	max. 12 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	15 400 kN
Basic static load rating	C_0	68 000 kN
Fatigue load limit	P_u	4 500 kN
Reference speed		240 r/min
Limiting speed		450 r/min
Minimum axial load factor	A	440

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit