


29496 EM


Spherical roller thrust bearings accommodate very heavy axial and considerable radial loads. They have the highest load rating of all thrust bearings, enabling compact, high power density bearing arrangements. By combining two or more spherical roller thrust bearings, it is possible to create a bearing arrangement that is either self-aligning, allowing misalignment of the shaft, or very stiff.



- High load carrying capacity
- Can accommodate combined loads
- Allow misalignment or create very stiff bearing arrangements
- Long service life and low friction
- Separable design

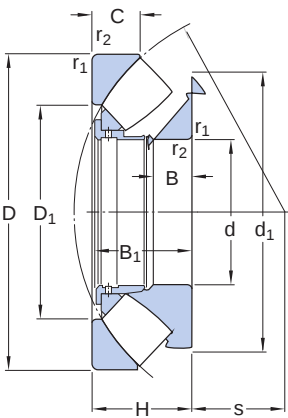

Dimensions		
d	480 mm	Bore diameter
D	850 mm	Outside diameter
H	224 mm	Height
d ₁	≈ 770 mm	Outside diameter of shaft washer end side face
D ₁	≈ 625 mm	Shoulder diameter outer ring
B	88 mm	Width shaft washer or length of shaft washer bore diameter that fits on shaft (bearings with a machined cage)
B ₁	216 mm	Height shaft washer + cage
C	108 mm	Height housing washer
s	280 mm	Distance from shaft washer end side face to pressure point
r _{1,2}	min. 9.5 mm	Chamfer dimension shaft washer

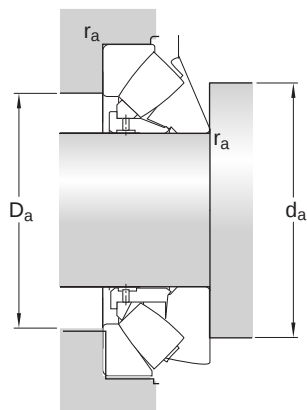

Abutment dimensions

d_a	min. 660 mm	Diameter of shaft abutment
D_a	max. 735 mm	Diameter of housing abutment
r_a	max. 8 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	9 550 kN
Basic static load rating	C_0	39 000 kN
Fatigue load limit	P_u	2 800 kN
Reference speed		340 r/min
Limiting speed		670 r/min
Minimum axial load factor	A	140

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit