


29480 EM


Spherical roller thrust bearings accommodate very heavy axial and considerable radial loads. They have the highest load rating of all thrust bearings, enabling compact, high power density bearing arrangements. By combining two or more spherical roller thrust bearings, it is possible to create a bearing arrangement that is either self-aligning, allowing misalignment of the shaft, or very stiff.



- High load carrying capacity
- Can accommodate combined loads
- Allow misalignment or create very stiff bearing arrangements
- Long service life and low friction
- Separable design

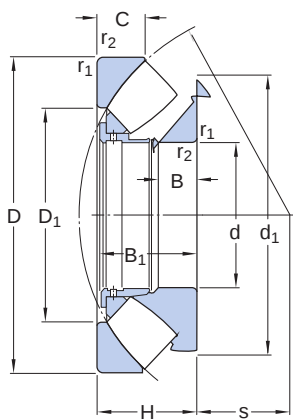

Dimensions		
d	400 mm	Bore diameter
D	710 mm	Outside diameter
H	185 mm	Height
d ₁	≈ 645 mm	Outside diameter of shaft washer end side face
D ₁	≈ 525 mm	Shoulder diameter outer ring
B	69 mm	Width shaft washer or length of shaft washer bore diameter that fits on shaft (bearings with a machined cage)
B ₁	178 mm	Height shaft washer + cage
C	89.5 mm	Height housing washer
s	234 mm	Distance from shaft washer end side face to pressure point
r _{1,2}	min. 7.5 mm	Chamfer dimension shaft washer

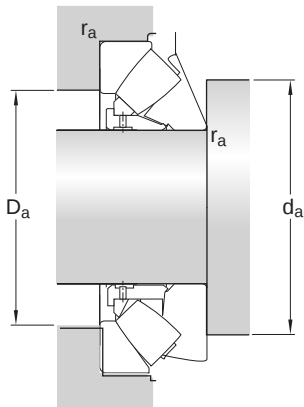

Abutment dimensions

d_a	min. 550 mm	Diameter of shaft abutment
D_a	max. 615 mm	Diameter of housing abutment
r_a	max. 6 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	7 650 kN
Basic static load rating	C_0	26 500 kN
Fatigue load limit	P_u	1 960 kN
Reference speed		480 r/min
Limiting speed		850 r/min
Minimum axial load factor	A	62

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit