


29464 E

Spherical roller thrust bearings accommodate very heavy axial and considerable radial loads. They have the highest load rating of all thrust bearings, enabling compact, high power density bearing arrangements. By combining two or more spherical roller thrust bearings, it is possible to create a bearing arrangement that is either self-aligning, allowing misalignment of the shaft, or very stiff.



- High load carrying capacity
- Can accommodate combined loads
- Allow misalignment or create very stiff bearing arrangements
- Long service life and low friction
- Separable design

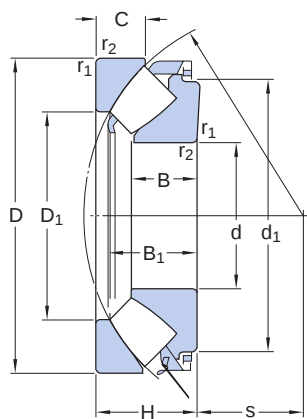

Dimensions		
d	320 mm	Bore diameter
D	580 mm	Outside diameter
H	155 mm	Height
d ₁	≈ 520 mm	Outside diameter of shaft washer end side face
D ₁	≈ 422 mm	Shoulder diameter outer ring
B	102 mm	Width shaft washer or length of shaft washer bore diameter that fits on shaft (bearings with a stamped steel cage)
B ₁	139.4 mm	Height shaft washer + cage
C	74.5 mm	Height housing washer
s	191 mm	Distance from shaft washer end side face to pressure point
r _{1,2}	min. 7.5 mm	Chamfer dimension shaft washer



Abutment dimensions

d_a	min. 450 mm	Diameter of shaft abutment
d_{b1}	max. 344 mm	Abutment diameter of spacer ring
d_{b2}	max. 367 mm	Outside diameter of spacer ring
D_a	max. 500 mm	Diameter of housing abutment
r_a	max. 6 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	5 700 kN
Basic static load rating	C_0	19 000 kN
Fatigue load limit	P_u	1 530 kN
Reference speed		600 r/min
Limiting speed		1 100 r/min
Minimum axial load factor	A	32

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit