


29448 E


Spherical roller thrust bearings accommodate very heavy axial and considerable radial loads. They have the highest load rating of all thrust bearings, enabling compact, high power density bearing arrangements. By combining two or more spherical roller thrust bearings, it is possible to create a bearing arrangement that is either self-aligning, allowing misalignment of the shaft, or very stiff.



- High load carrying capacity
- Can accommodate combined loads
- Allow misalignment or create very stiff bearing arrangements
- Long service life and low friction
- Separable design

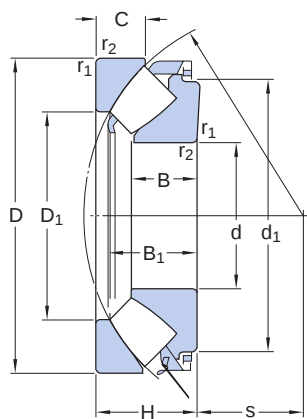

| Dimensions       |           |                                                                                                                    |
|------------------|-----------|--------------------------------------------------------------------------------------------------------------------|
| d                | 240 mm    | Bore diameter                                                                                                      |
| D                | 440 mm    | Outside diameter                                                                                                   |
| H                | 122 mm    | Height                                                                                                             |
| d <sub>1</sub>   | ≈ 391 mm  | Outside diameter of shaft washer end side face                                                                     |
| D <sub>1</sub>   | ≈ 322 mm  | Shoulder diameter outer ring                                                                                       |
| B                | 76 mm     | Width shaft washer or length of shaft washer bore diameter that fits on shaft (bearings with a stamped steel cage) |
| B <sub>1</sub>   | 107.1 mm  | Height shaft washer + cage                                                                                         |
| C                | 59 mm     | Height housing washer                                                                                              |
| s                | 142 mm    | Distance from shaft washer end side face to pressure point                                                         |
| r <sub>1,2</sub> | min. 6 mm | Chamfer dimension shaft washer                                                                                     |

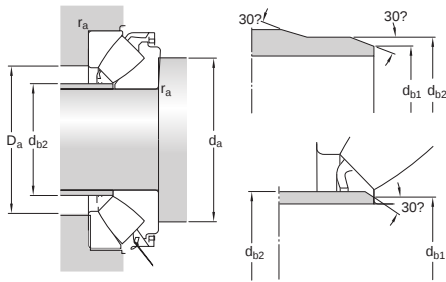

### Abutment dimensions

|          |             |                                  |
|----------|-------------|----------------------------------|
| $d_a$    | min. 335 mm | Diameter of shaft abutment       |
| $d_{b1}$ | max. 258 mm | Abutment diameter of spacer ring |
| $d_{b2}$ | max. 276 mm | Outside diameter of spacer ring  |
| $D_a$    | max. 378 mm | Diameter of housing abutment     |
| $r_a$    | max. 5 mm   | Fillet radius                    |

### Calculation data

|                           |       |             |
|---------------------------|-------|-------------|
| Basic dynamic load rating | C     | 3 400 kN    |
| Basic static load rating  | $C_0$ | 10 200 kN   |
| Fatigue load limit        | $P_u$ | 930 kN      |
| Reference speed           |       | 850 r/min   |
| Limiting speed            |       | 1 500 r/min |
| Minimum axial load factor | A     | 9.9         |

### Tolerances and clearances

#### GENERAL BEARING SPECIFICATIONS

- Tolerances: table

#### BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit