


811/600 M/HB1

Single row cylindrical roller thrust bearings are designed to accommodate heavy axial loads and peak loads in one direction, but not radial loads. They provide a high degree of stiffness and require little axial space. They are mainly used in applications where thrust ball bearings do not have sufficient load carrying capacity. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.



- High axial load carrying capacity
- High stiffness
- Long service life
- Require little axial space
- Separable design

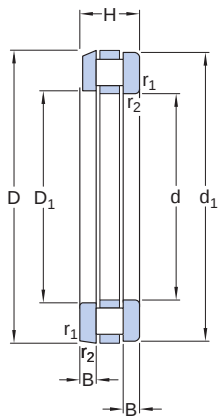

Dimensions		
d	600 mm	Bore diameter
D	710 mm	Outside diameter
H	85 mm	Height
d ₁	705 mm	Outside diameter shaft washer
D ₁	605 mm	Bore diameter housing washer
B	25.5 mm	Height shaft washer
r _{1,2}	min. 3 mm	Chamfer dimension housing washer



Abutment dimensions		
d _a	min. 702 mm	Abutment diameter shaft
D _a	max. 624 mm	Abutment diameter housing
r _a	max. 2.5 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	1 800 kN
Basic static load rating	C ₀	11 600 kN
Fatigue load limit	P _u	720 kN
Reference speed		240 r/min
Limiting speed		500 r/min
Minimum axial load factor	A	10.765

Included products

Shaft washer	IW-811/600/HB3
Housing washer	OW-811/600/HB2

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table, table, values

DESIGN CONSIDERATIONS

- table

BEARING INTERFACES

- Seat tolerances for standard conditions