


K 81260 M

Cylindrical roller and cage thrust assemblies are designed to accommodate heavy axial loads and peak loads in one direction, but not radial loads. Thrust assemblies can be used in applications where the adjacent components serve as raceways and enable bearing arrangements with a low axial section heights. Where the adjacent components cannot serve as raceways, they can be combined with one or two bearing washers to create complete bearings.



- High axial load carrying capacity
- High stiffness
- Long service life
- Require little axial space
- Can be combined with bearing washers

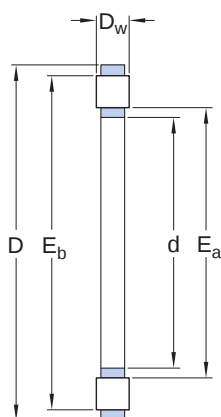

Dimensions		
d	300 mm	Bore diameter
D	420 mm	Outside diameter
D _w	38 mm	Diameter roller
E _a	329 mm	Raceway diameter (min.) roller and cage thrust assembly
E _b	412 mm	Raceway diameter (max.) roller and cage thrust assembly

Calculation data

Basic dynamic load rating	C	1 530 kN
Basic static load rating	C ₀	7 200 kN
Fatigue load limit	P _u	540 kN
Reference speed		320 r/min
Limiting speed		630 r/min
Minimum axial load factor	A	4.147

Associated products

Shaft washer	WS 81260
Housing washer	GS 81260

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table, table, values

DESIGN CONSIDERATIONS

- table

BEARING INTERFACES

- Seat tolerances for standard conditions

AGA BEARINGS