


K 81148 M

Cylindrical roller and cage thrust assemblies are designed to accommodate heavy axial loads and peak loads in one direction, but not radial loads. Thrust assemblies can be used in applications where the adjacent components serve as raceways and enable bearing arrangements with a low axial section heights. Where the adjacent components cannot serve as raceways, they can be combined with one or two bearing washers to create complete bearings.



- High axial load carrying capacity
- High stiffness
- Long service life
- Require little axial space
- Can be combined with bearing washers

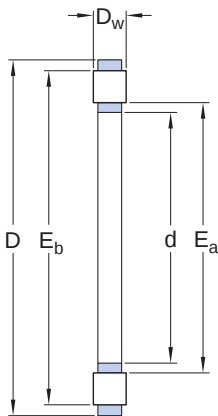

Dimensions		
d	240 mm	Bore diameter
D	300 mm	Outside diameter
D _w	18 mm	Diameter roller
E _a	248 mm	Raceway diameter (min.) roller and cage thrust assembly
E _b	296 mm	Raceway diameter (max.) roller and cage thrust assembly

Calculation data

Basic dynamic load rating	C	475 kN
Basic static load rating	C ₀	2 450 kN
Fatigue load limit	P _u	196 kN
Reference speed		560 r/min
Limiting speed		1 100 r/min
Minimum axial load factor	A	0.48

Associated products

Shaft washer	WS 81148
Housing washer	GS 81148

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table, table, values

DESIGN CONSIDERATIONS

- table

BEARING INTERFACES

- Seat tolerances for standard conditions

AGA BEARINGS