


K 81140 M

Cylindrical roller and cage thrust assemblies are designed to accommodate heavy axial loads and peak loads in one direction, but not radial loads. Thrust assemblies can be used in applications where the adjacent components serve as raceways and enable bearing arrangements with a low axial section heights. Where the adjacent components cannot serve as raceways, they can be combined with one or two bearing washers to create complete bearings.



- High axial load carrying capacity
- High stiffness
- Long service life
- Require little axial space
- Can be combined with bearing washers

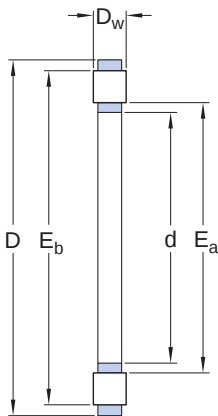

Dimensions		
d	200 mm	Bore diameter
D	250 mm	Outside diameter
D _w	15 mm	Diameter roller
E _a	206 mm	Raceway diameter (min.) roller and cage thrust assembly
E _b	243 mm	Raceway diameter (max.) roller and cage thrust assembly

Calculation data

Basic dynamic load rating	C	310 kN
Basic static load rating	C ₀	1 500 kN
Fatigue load limit	P _u	125 kN
Reference speed		700 r/min
Limiting speed		1 400 r/min
Minimum axial load factor	A	0.18

Associated products

Shaft washer	WS 81140
Housing washer	GS 81140

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table, table, values

DESIGN CONSIDERATIONS

- table

BEARING INTERFACES

- Seat tolerances for standard conditions

AGA BEARINGS