


## K 81122 TN

Cylindrical roller and cage thrust assemblies are designed to accommodate heavy axial loads and peak loads in one direction, but not radial loads. Thrust assemblies can be used in applications where the adjacent components serve as raceways and enable bearing arrangements with a low axial section heights. Where the adjacent components cannot serve as raceways, they can be combined with one or two bearing washers to create complete bearings.



- High axial load carrying capacity
- High stiffness
- Long service life
- Require little axial space
- Can be combined with bearing washers

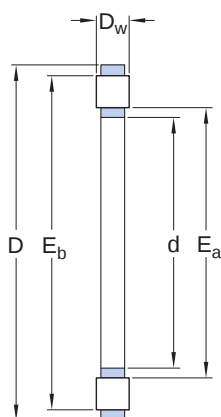

| Dimensions     |        |                                                         |
|----------------|--------|---------------------------------------------------------|
| d              | 110 mm | Bore diameter                                           |
| D              | 145 mm | Outside diameter                                        |
| D <sub>w</sub> | 11 mm  | Diameter roller                                         |
| E <sub>a</sub> | 114 mm | Raceway diameter (min.) roller and cage thrust assembly |
| E <sub>b</sub> | 141 mm | Raceway diameter (max.) roller and cage thrust assembly |

### Calculation data

|                           |                |             |
|---------------------------|----------------|-------------|
| Basic dynamic load rating | C              | 163 kN      |
| Basic static load rating  | C <sub>0</sub> | 680 kN      |
| Fatigue load limit        | P <sub>u</sub> | 65.5 kN     |
| Reference speed           |                | 1 100 r/min |
| Limiting speed            |                | 2 200 r/min |
| Minimum axial load factor | A              | 0.037       |

Associated products

|                  |           |
|------------------|-----------|
| Shaft washer     | WS 81122  |
| Housing washer   | GS 81122  |
| Universal washer | LS 110145 |

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table, table, values

DESIGN CONSIDERATIONS

- table

BEARING INTERFACES

- Seat tolerances for standard conditions

AGA BEARINGS