


BC4B 322993 A/HA7



Four-row cylindrical roller bearings are designed to accommodate very heavy radial loads in combination with medium to high speeds. The NR assortment includes many designs and variants, such as bearings with a cage and full complement bearings. Depending on the configuration of the outer and inner rings, the bearings are available in locating as well as non-locating designs.

- Exceptional high radial load carrying capacity
- Low friction
- Long service life
- Low cross-sectional height

Design variant/feature	BC4.20/W33GWI
Bore type	Cylindrical with helical groove

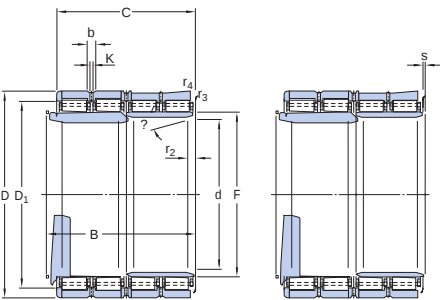

Dimensions		
d	460 mm	Bore diameter
D	650 mm	Outside diameter
B	460 mm	Total bearing width over inner ring(s)
C	424 mm	Total bearing width over outer ring(s)
D ₁	≈ 594 mm	Outer ring shoulder diameter
F	510 mm	Raceway diameter inner ring
b	16.7 mm	Width of annular groove
K	9 mm	Diameter lubrication hole (outer ring)
r _{1,2}	min. 11.5 mm	Corner radius/chamfer inner ring
α	20 °	Chamfer angle inner ring
r _{3,4}	min. 3 mm	Chamfer dimension on the outer ring

Calculation data

Basic dynamic load rating	C	7 810 kN
Basic static load rating	C ₀	18 300 kN
Fatigue load limit	P _u	1 530 kN
Calculation factor	k _r	530

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal
- Radial internal clearance: table
- Axial internal clearance

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit

AGA BEARINGS