

316077 A




Double row cylindrical roller bearings are designed to accommodate high to very high radial loads in combination with medium to high speeds. The NR assortment includes many designs and variants, such as standard and full complement bearings and also greased and sealed bearings. Depending on the configuration of the outer and inner rings, the bearings are available in locating as well as non-locating designs.


- High to very high radial load carrying capacity
- Low friction
- Long service life

Design variant/feature

NNU.4/C4W33WI

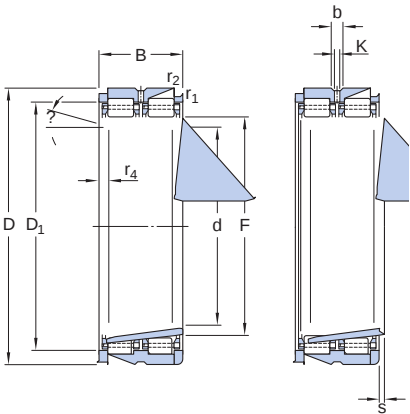

Dimensions		
d	440 mm	Bore diameter
D	620 mm	Outside diameter
B	225 mm	Overall bearing width
D ₁	≈ 557 mm	Shoulder diameter outer ring
F	487 mm	Raceway diameter inner ring
b	16.7 mm	Width of annular groove
K	9 mm	Diameter lubrication hole
r _{1,2}	min. 2 mm	Chamfer dimension outer ring
r _{3,4}	min. 14.4 mm	Chamfer dimension inner ring
α	20 °	Chamfer angle inner ring
s	max. 2.7 mm	Permissible axial displacement from the normal position of one bearing ring relative to the other

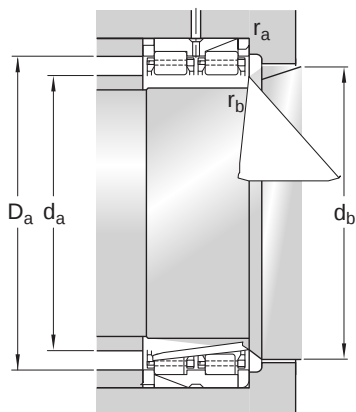

Abutment dimensions

d_a	min. 460 mm	Abutment diameter spacer sleeve
d_a	max. 480 mm	Abutment diameter spacer sleeve
d_b	min. 492 mm	Abutment diameter shaft
D_a	max. 610 mm	Abutment diameter spacer sleeve / housing
r_a	max. 1.5 mm	Fillet radius
r_b	max. 2 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	3 910 kN
Basic static load rating	C_0	9 800 kN
Fatigue load limit	P_u	800 kN
Reference speed		700 r/min
Limiting speed		1 000 r/min
Calculation factor	k_r	0.35

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6, P5
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit