


BC2B 319961



Double row cylindrical roller bearings are designed to accommodate high to very high radial loads in combination with medium to high speeds. The NR assortment includes many designs and variants, such as standard and full complement bearings and also greased and sealed bearings. Depending on the configuration of the outer and inner rings, the bearings are available in locating as well as non-locating designs.

- High to very high radial load carrying capacity
- Low friction
- Long service life

Design variant/feature		NNUB.1/W33WI	
		Dimensions	
d	370 mm	Bore diameter	
D	520 mm	Outside diameter	
B	193 mm	Overall bearing width	
C	169 mm	Width outer ring	
D ₁	≈ 468 mm	Shoulder diameter outer ring	
F	409 mm	Raceway diameter inner ring	
b	16.7 mm	Width of annular groove	
K	6 mm	Diameter lubrication hole	
r _{1,2}	min. 2 mm	Chamfer dimension outer ring	
r _{3,4}	min. 10.8 mm	Chamfer dimension inner ring	
α	20 °	Chamfer angle inner ring	
s	max. 16.7 mm	Permissible axial displacement from the normal position of one bearing ring relative to the other	

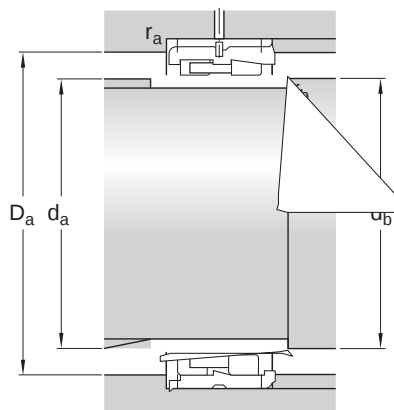

Abutment dimensions

d_a	min. 390 mm	Abutment diameter spacer sleeve
d_a	max. 404 mm	Abutment diameter spacer sleeve
d_b	min. 414 mm	Abutment diameter shaft
D_a	max. 512 mm	Abutment diameter spacer sleeve / housing
r_a	max. 1.5 mm	Fillet radius
r_b	max. 1.5 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	2 750 kN
Basic static load rating	C_0	6 700 kN
Fatigue load limit	P_u	570 kN
Reference speed		850 r/min
Limiting speed		1 300 r/min
Calculation factor	k_r	0.34

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6, P5
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit