


NJ 28/710 ECMA


Single row cylindrical roller bearings are designed to accommodate high radial loads in combination with high speeds. Having two integral flanges on the outer ring and one on the inner ring, NJ design bearings can accommodate axial displacement in one direction. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.



- High radial load carrying capacity
- Low friction
- Long service life
- Locate the shaft axially in one direction
- Separable design

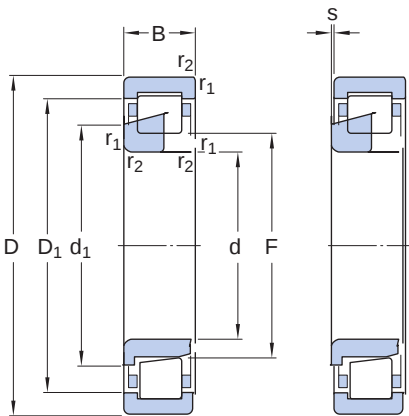

Dimensions		
d	710 mm	Bore diameter
D	870 mm	Outside diameter
B	95 mm	Width
d ₁	≈ 766 mm	Shoulder diameter of inner ring
D ₁	≈ 817 mm	Shoulder diameter of outer ring
F	751 mm	Raceway diameter of inner ring
r _{1,2}	min. 4 mm	Chamfer dimension
s	max. 1.5 mm	Permissible axial displacement

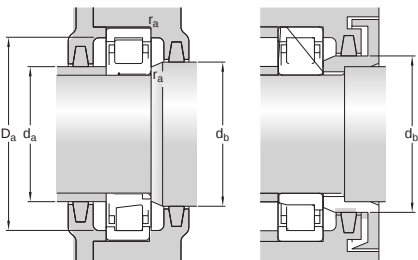

Abutment dimensions		
d _a	min. 728 mm	Diameter of spacer sleeve
d _a	max. 745 mm	Diameter of spacer sleeve
d _b	min. 771 mm	Diameter of shaft abutment
D _a	max. 853 mm	Diameter of housing abutment

r_a	max. 3 mm	Radius of fillet
r_a	max. 3 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	1 940 kN
Basic static load rating	C_0	5 000 kN
Fatigue load limit	P_u	375 kN
Reference speed		630 r/min
Limiting speed		850 r/min
Minimum load factor	k_r	0.15
Limiting value	e	0.3
Calculation factor	Y	0.4

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (), P6, Normal (inch)
- Radial internal clearance: cylindrical bore, tapered bore
- Axial internal clearance: NUP, NJ + HJ

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit