


NUP 1880 MP


Single row cylindrical roller bearings are designed to accommodate high radial loads in combination with high speeds. Having two integral flanges on the outer ring and one integral flange and one loose flange ring on the inner ring, NUP design bearings can locate the shaft axially in both directions. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.



- High radial load carrying capacity
- Low friction
- Long service life
- Locate the shaft axially in both directions
- Separable design

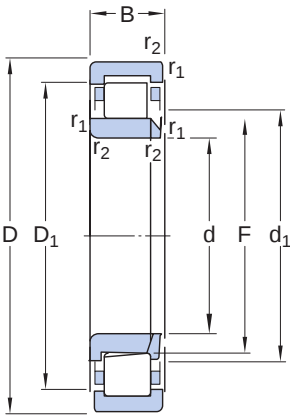

Dimensions		
d	400 mm	Bore diameter
D	500 mm	Outside diameter
B	46 mm	Width
d ₁	≈ 432 mm	Shoulder diameter of inner ring
D ₁	≈ 464 mm	Shoulder diameter of outer ring
F	423 mm	Raceway diameter of inner ring
r _{1,2}	min. 2.1 mm	Chamfer dimension

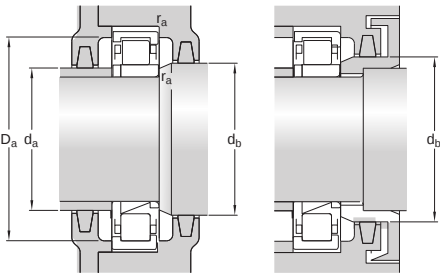

Abutment dimensions		
d _a	min. 410 mm	Diameter of spacer sleeve
d _b	min. 438 mm	Diameter of shaft abutment
D _a	max. 488 mm	Diameter of housing abutment
r _a	max. 2 mm	Radius of fillet
r _a	max. 2 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	572 kN
Basic static load rating	C ₀	1 180 kN
Fatigue load limit	P _u	96.5 kN
Reference speed		1 300 r/min
Limiting speed		1 900 r/min
Minimum load factor	k _r	0.1
Limiting value	e	0.2
Calculation factor	Y	0.6

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (μ), P6, Normal (inch)
- Radial internal clearance: cylindrical bore, tapered bore
- Axial internal clearance: NUP, NJ + HJ

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit