


NU 3980 ECMA


Single row cylindrical roller bearings are designed to accommodate high radial loads in combination with high speeds. Having two integral flanges on the outer ring and no flanges on the inner ring, NU design bearings can accommodate axial displacement in both directions. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.



- High radial load carrying capacity
- Low friction
- Long service life
- Accommodate axial displacement in both directions
- Separable design

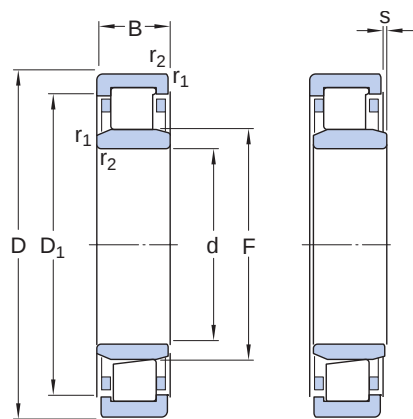

Dimensions		
d	400 mm	Bore diameter
D	540 mm	Outside diameter
B	106 mm	Width
D ₁	≈ 500 mm	Shoulder diameter of outer ring
F	434.5 mm	Raceway diameter of inner ring
r _{1,2}	min. 4 mm	Chamfer dimension
s	max. 4 mm	Permissible axial displacement

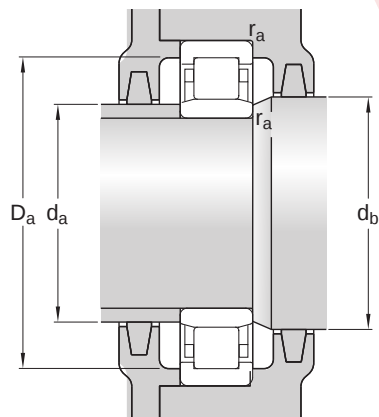

Abutment dimensions		
da	min. 415 mm	Diameter of spacer sleeve
da	max. 429 mm	Diameter of spacer sleeve
db	min. 439 mm	Diameter of shaft abutment
Da	max. 524 mm	Diameter of housing abutment
ra	max. 3 mm	Radius of fillet

r_a	max. 3 mm	Radius of fillet
r_b	max. 3 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	1 760 kN
Basic static load rating	C_0	3 750 kN
Fatigue load limit	P_u	320 kN
Reference speed		1 000 r/min
Limiting speed		1 500 r/min
Minimum load factor	k_r	0.1
Limiting value	e	0.3
Calculation factor	Y	0.4

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal (), P6, Normal (inch)
- Radial internal clearance: cylindrical bore, tapered bore
- Axial internal clearance: NUP, NJ + HJ

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit