


NU 2372 ECMA


Single row cylindrical roller bearings are designed to accommodate high radial loads in combination with high speeds. Having two integral flanges on the outer ring and no flanges on the inner ring, NU design bearings can accommodate axial displacement in both directions. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.



- High radial load carrying capacity
- Low friction
- Long service life
- Accommodate axial displacement in both directions
- Separable design

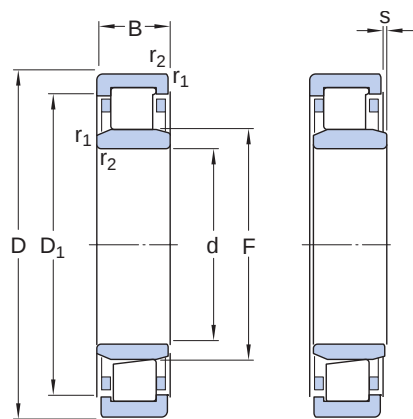

Dimensions		
d	360 mm	Bore diameter
D	750 mm	Outside diameter
B	224 mm	Width
D ₁	≈ 617 mm	Shoulder diameter of outer ring
F	465 mm	Raceway diameter of inner ring
r _{1,2}	min. 7.5 mm	Chamfer dimension
s	max. 10 mm	Permissible axial displacement

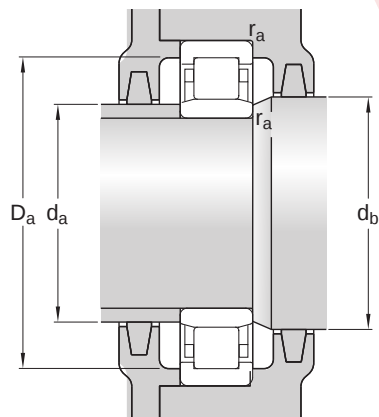

Abutment dimensions		
d _a	min. 392 mm	Diameter of spacer sleeve
d _a	max. 453 mm	Diameter of spacer sleeve
d _b	min. 470 mm	Diameter of shaft abutment
D _a	max. 718 mm	Diameter of housing abutment
r _a	max. 6 mm	Radius of fillet

Calculation data

Basic dynamic load rating	C	5 010 kN
Basic static load rating	C ₀	8 150 kN
Fatigue load limit	P _u	630 kN
Reference speed		750 r/min
Limiting speed		1 300 r/min
Minimum load factor	k _r	0.38
Limiting value	e	0.3
Calculation factor	Y	0.4

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal ($\circ$), P6, Normal (inch)
- Radial internal clearance: cylindrical bore, tapered bore
- Axial internal clearance: NUP, NJ + HJ

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit