


NJ 1060 MA


Single row cylindrical roller bearings are designed to accommodate high radial loads in combination with high speeds. Having two integral flanges on the outer ring and one on the inner ring, NJ design bearings can accommodate axial displacement in one direction. An important feature is the separable design, which facilitates mounting and enables the bearing components to be interchanged.



- High radial load carrying capacity
- Low friction
- Long service life
- Locate the shaft axially in one direction
- Separable design

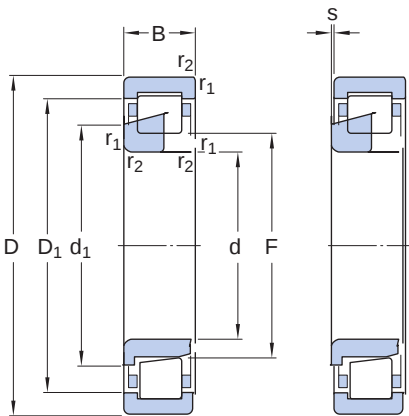

Dimensions		
d	300 mm	Bore diameter
D	460 mm	Outside diameter
B	74 mm	Width
d ₁	≈ 356 mm	Shoulder diameter of inner ring
D ₁	≈ 402 mm	Shoulder diameter of outer ring
F	340 mm	Raceway diameter of inner ring
r _{1,2}	min. 4 mm	Chamfer dimension
s	max. 4 mm	Permissible axial displacement

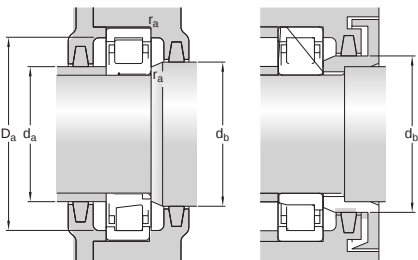

Abutment dimensions		
d _a	min. 317 mm	Diameter of spacer sleeve
d _a	max. 335 mm	Diameter of spacer sleeve
d _b	min. 360 mm	Diameter of shaft abutment
D _a	max. 443 mm	Diameter of housing abutment

r_a max. 3 mm Radius of fillet

Calculation data

AGA performance class		AGA Explorer
Basic dynamic load rating	C	858 kN
Basic static load rating	C_0	1 370 kN
Fatigue load limit	P_u	129 kN
Reference speed		1 500 r/min
Limiting speed		2 000 r/min
Minimum load factor	k_r	0.1
Limiting value	e	0.2
Calculation factor	Y	0.6

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal ($\circ$), P6, Normal (inch)
- Radial internal clearance: cylindrical bore, tapered bore
- Axial internal clearance: NUP, NJ + HJ

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit