

23068 CACK/W33


Spherical roller bearings can accommodate heavy loads in both directions. They are self-aligning and accommodate misalignment and shaft deflections, with virtually no increase in friction or temperature. The design includes features to facilitate relubrication. The bearings can be used in a modular system, including housings, sleeves and nuts.




- Accommodate misalignment
- High load carrying capacity
- Relubrication features
- Low friction and long service life
- Increased wear resistance

Bore type

Tapered 1:12

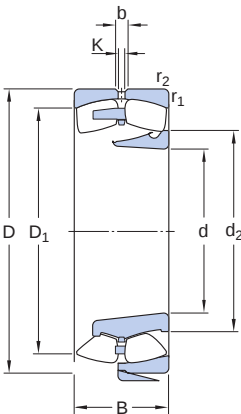

Dimensions		
d	340 mm	Bore diameter
D	520 mm	Outside diameter
B	133 mm	Width
d ₂	≈ 398 mm	Shoulder diameter of inner ring
D ₁	≈ 468 mm	Shoulder/recess diameter of outer ring
b	22.3 mm	Width of lubrication groove
K	12 mm	Diameter of lubrication hole
r _{1,2}	min. 5 mm	Chamfer dimension
Normal		ISO tolerance class for dimensions



Abutment dimensions		
D _a	max. 502 mm	Diameter of housing abutment
r _a	max. 4 mm	Radius of fillet

Calculation data

AGA performance class		AGA Explorer
Basic dynamic load rating	C	2 812 kN
Basic static load rating	C ₀	4 550 kN
Fatigue load limit	P _u	335 kN
Reference speed		1 000 r/min
Limiting speed		1 300 r/min
Limiting value	e	0.24
Calculation factor	Y ₁	2.8
Calculation factor	Y ₂	4.2
Calculation factor	Y ₀	2.8

Tolerances of run-out

ISO tolerance class for geol tolerances	Normal
---	--------

Radial internal clearance

Minimum initial clearance	270 µm
Maximum initial clearance	360 µm

Tolerances of run-out

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6, P5, tapered bore 1:12, tapered bore 1:30
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions

- Tolerances and resultant fit

AGA BEARINGS