

22340 CCKJA/W33VA405


Spherical roller bearings can accommodate heavy loads in both directions. They are self-aligning and accommodate misalignment and shaft deflections, with virtually no increase in friction or temperature. This bearing design offers excellent performance in many types of vibrating machinery. The design includes features to facilitate relubrication. The bearings can be used in a modular system, including housings, sleeves and nuts.




- Accommodate misalignment
- High load carrying capacity
- Accommodate very high vibration levels
- Low friction and long service life
- Increased wear resistance

Bore type

Tapered 1:12

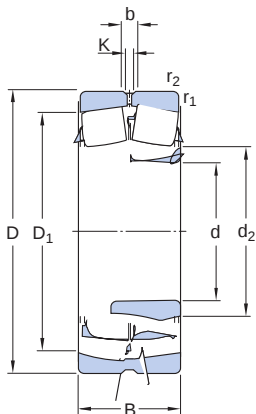

Dimensions		
d	200 mm	Bore diameter
t _{Δdmp}	0.0 – 0.046 mm	Deviation limits of mid-range bore diameter
t _{ΔSL}	0.0 – 0.046 mm	Deviation limits of tapered slope
D	420 mm	Outside diameter
t _{ΔDmp}	-0.045 – 0.0 mm	Deviation limits of mid-range outside diameter
B	138 mm	Width
t _{ΔBs}	-0.08 – 0.0 mm	Deviation limits of ring width
d ₂	≈ 249 mm	Shoulder diameter of inner ring
D ₁	≈ 351 mm	Shoulder/recess diameter of outer ring
b	22.3 mm	Width of lubrication groove
K	12 mm	Diameter of lubrication hole
r _{1,2}	min. 5 mm	Chamfer dimension

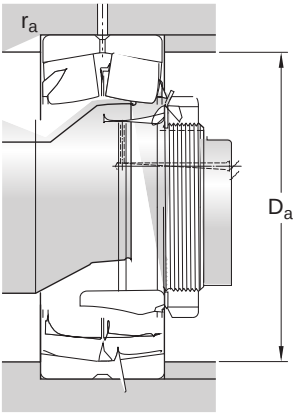

Normal, bore to P5 and outside diameter P6		ISO tolerance class for dimensions
Abutment dimensions		
D_a	max. 400 mm	Diameter of housing abutment
r_a	max. 4 mm	Radius of fillet

Calculation data

AGA performance class		AGA Explorer
Basic dynamic load rating	C	2 439 kN
Basic static load rating	C_0	2 900 kN
Fatigue load limit	P_u	224 kN
Reference speed		1 200 r/min
Limiting speed		1 500 r/min
Limiting value	e	0.33
Calculation factor	Y_1	2
Calculation factor	Y_2	3
Calculation factor	Y_0	2
Permissible rotational acceleration for oil lubrication		540 m/s ²
Permissible linear acceleration for oil lubrication		167 m/s ²

Tolerances of run-out

Range of section height at inner ring of assembled bearing	t_{Kia}	10 μ m
Maximum run-out of inner ring side face to the bore	t_{Sd}	11 μ m

Range of section height at outer ring of assembled bearing	t_{Kea}	23 μm
Perpendicularity of outer ring outside surface	t_{SD}	7.5 μm
ISO tolerance class for geoal tolerances		P5

Radial internal clearance

Minimum initial clearance	290 μm
Maximum initial clearance	370 μm

Tolerances of run-out

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6, P5, tapered bore 1:12, tapered bore 1:30
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit