

22324 CCJA/W33VA406


Spherical roller bearings can accommodate heavy loads in both directions. They are self-aligning and accommodate misalignment and shaft deflections, with virtually no increase in friction or temperature. This bearing design offers excellent performance in many types of vibrating machinery. The design includes features to facilitate relubrication. The bearings can be used in a modular system, including housings, sleeves and nuts.




- Accommodate misalignment
- High load carrying capacity
- Accommodate very high vibration levels
- Low friction and long service life
- Increased wear resistance

Bore type

Cylindrical

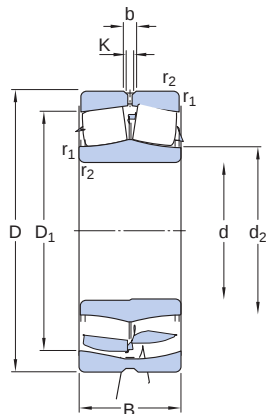

Dimensions		
d	120 mm	Bore diameter
D	260 mm	Outside diameter
B	86 mm	Width
d ₂	≈ 152 mm	Shoulder diameter of inner ring
D ₁	≈ 216 mm	Shoulder/recess diameter of outer ring
b	13.9 mm	Width of lubrication groove
K	7.5 mm	Diameter of lubrication hole
r _{1,2}	min. 3 mm	Chamfer dimension
Normal, bore to P5 and outside diameter P6		ISO tolerance class for dimensions

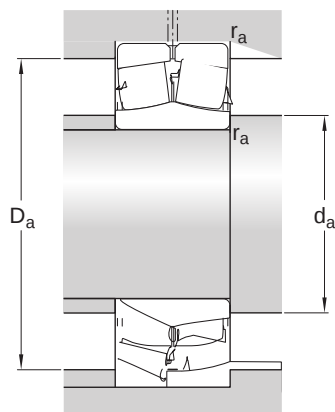

Abutment dimensions

d_a	min. 134 mm	Diameter of shaft abutment
D_a	max. 246 mm	Diameter of housing abutment
r_a	max. 2.5 mm	Radius of fillet

Calculation data

AGA performance class		AGA Explorer
Basic dynamic load rating	C	1 019 kN
Basic static load rating	C_0	1 120 kN
Fatigue load limit	P_u	100 kN
Reference speed		2 000 r/min
Limiting speed		2 600 r/min
Limiting value	e	0.35
Calculation factor	Y_1	1.9
Calculation factor	Y_2	2.9
Calculation factor	Y_0	1.8
Permissible rotational acceleration for oil lubrication		942 m/s ²
Permissible linear acceleration for oil lubrication		206 m/s ²

Radial internal clearance

Minimum initial clearance	160 μ m
Maximum initial clearance	210 μ m

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6, P5,
tapered bore 1:12, tapered bore 1:30
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit

AGA BEARINGS