



QJ 1064 MA

Four-point contact ball bearings can accommodate high axial loads in both directions and small radial loads. They can operate at very high speeds and are more suitable than deep groove ball bearings for supporting large axial forces. The outer ring, with ball and cage assembly, can be mounted separately from the two inner ring halves.

- High-speed capability
- Accommodate high axial loads in both directions and small radial loads
- Require considerably less axial space than double row angular contact ball bearings

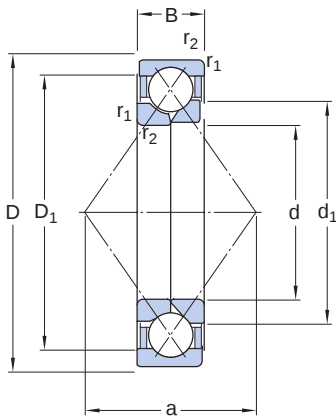

Dimensions		
d	320 mm	Bore diameter
D	480 mm	Outside diameter
B	74 mm	Width
d ₁	≈ 376 mm	Shoulder diameter inner ring
D ₁	≈ 424 mm	Shoulder diameter outer ring/ inner diameter housing washer
a	280 mm	Distance pressure point(s)
r _{1,2}	min. 5 mm	Chamfer dimension inner ring

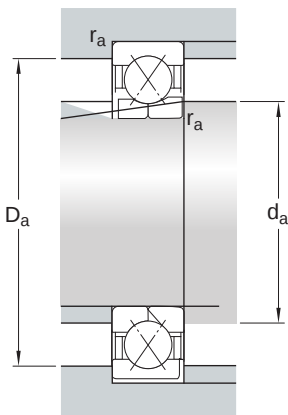

Abutment dimensions		
d _a	min. 338 mm	Abutment diameter shaft
D _a	max. 462 mm	Abutment diameter housing
r _a	max. 3 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	715 kN
Basic static load rating	C ₀	1 530 kN
Fatigue load limit	P _u	32 kN
Limiting speed		2 000 r/min
Calculation factor	A	6.29
Limiting value	e	0.95
Calculation factor	X	0.6
Calculation factor	Y ₀	0.58
Calculation factor	Y ₁	0.66
Calculation factor	Y ₂	1.07

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6
- Internal clearance: table

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit