


### AXK 0619 TN



Needle roller and cage thrust assemblies are designed to accommodate heavy axial loads and peak loads in one direction. They provide a high degree of stiffness within a minimum axial space. In applications where the faces of adjacent machine components serve as raceways, needle roller thrust bearings take up no more space than a conventional thrust washer. The bearings can also be combined with bearing washers to create complete bearings.

- High axial load carrying capacity
- High stiffness
- Long service life
- Require minimal axial space
- Can be combined with bearing washers

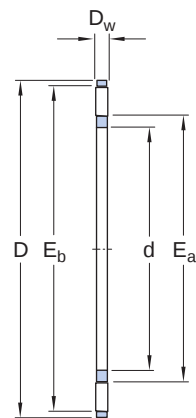

| Dimensions     |            |                                                         |
|----------------|------------|---------------------------------------------------------|
| d              | 6 mm       | Bore diameter                                           |
| D              | 19 mm      | Outside diameter                                        |
| D <sub>w</sub> | 2 mm       | Diameter roller                                         |
| E <sub>a</sub> | min. 7 mm  | Raceway diameter (min.) roller and cage thrust assembly |
| E <sub>b</sub> | max. 18 mm | Raceway diameter (max.) roller and cage thrust assembly |

#### Calculation data

|                           |                |              |
|---------------------------|----------------|--------------|
| Basic dynamic load rating | C              | 6.3 kN       |
| Basic static load rating  | C <sub>0</sub> | 16 kN        |
| Fatigue load limit        | P <sub>u</sub> | 1.86 kN      |
| Reference speed           |                | 6 000 r/min  |
| Limiting speed            |                | 12 000 r/min |

Associated products

|                       |         |
|-----------------------|---------|
| Universal washer      | LS 0619 |
| Thin universal washer | AS 0619 |

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table, values

DESIGN CONSIDERATIONS

- table

BEARING INTERFACES

- Seat tolerances for standard conditions

AGA BEARINGS