


29434 E

Spherical roller thrust bearings accommodate very heavy axial and considerable radial loads. They have the highest load rating of all thrust bearings, enabling compact, high power density bearing arrangements. By combining two or more spherical roller thrust bearings, it is possible to create a bearing arrangement that is either self-aligning, allowing misalignment of the shaft, or very stiff.



- High load carrying capacity
- Can accommodate combined loads
- Allow misalignment or create very stiff bearing arrangements
- Long service life and low friction
- Separable design

Dimensions		
d	170 mm	Bore diameter
D	340 mm	Outside diameter
H	103 mm	Height
d ₁	≈ 297 mm	Outside diameter of shaft washer end side face
D ₁	≈ 236 mm	Shoulder diameter outer ring
B	65.5 mm	Width shaft washer or length of shaft washer bore diameter that fits on shaft (bearings with a stamped steel cage)
B ₁	91.2 mm	Height shaft washer + cage
C	50 mm	Height housing washer
s	104 mm	Distance from shaft washer end side face to pressure point
r _{1,2}	min. 5 mm	Chamfer dimension shaft washer

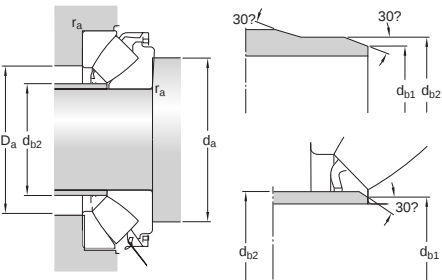

Abutment dimensions

d_a	min. 250 mm	Diameter of shaft abutment
d_{b1}	max. 185 mm	Abutment diameter of spacer ring
d_{b2}	max. 199 mm	Outside diameter of spacer ring
D_a	max. 286 mm	Diameter of housing abutment
r_a	max. 4 mm	Fillet radius

Calculation data

Basic dynamic load rating	C	2 360 kN
Basic static load rating	C_0	6 550 kN
Fatigue load limit	P_u	640 kN
Reference speed		1 100 r/min
Limiting speed		1 900 r/min
Minimum axial load factor	A	4.1

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit