

24040-2CS5K30/VT143


Spherical roller bearings can accommodate heavy loads in both directions. They are self-aligning and accommodate misalignment and shaft deflections, with virtually no increase in friction or temperature. They can be used in a modular system, including housings, sleeves and nuts.




- Accommodate misalignment
- High load carrying capacity
- Low friction and long service life
- Extensive range available sealed for increased reliability
- Increased wear resistance

Bore type

Tapered 1:30

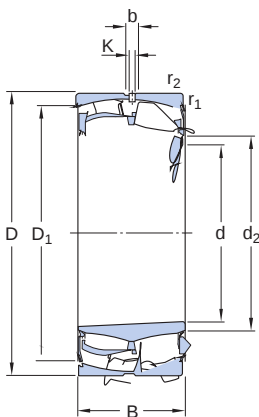

Dimensions		
d	200 mm	Bore diameter
t _{Δdmp}	0.0 – 0.03 mm	Deviation limits of mid-range bore diameter
t _{ΔSL}	0.0 – 0.046 mm	Deviation limits of tapered slope
D	310 mm	Outside diameter
t _{ΔDmp}	-0.035 – 0.0 mm	Deviation limits of mid-range outside diameter
B	109 mm	Width
t _{ΔBs}	-0.08 – 0.0 mm	Deviation limits of ring width
d ₂	≈ 217 mm	Shoulder diameter of inner ring
D ₁	≈ 282 mm	Shoulder/recess diameter of outer ring
b	11.1 mm	Width of lubrication groove
K	6 mm	Diameter of lubrication hole
r _{1,2}	min. 2.1 mm	Chamfer dimension
Normal		ISO tolerance class for dimensions

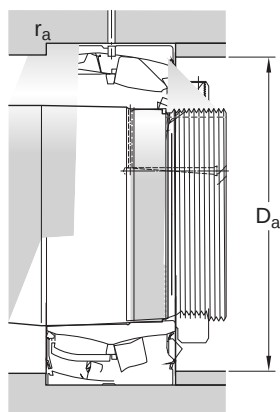

Abutment dimensions

D_a	max. 299 mm	Diameter of housing abutment
r_a	max. 2 mm	Radius of fillet

Calculation data

AGA performance class		AGA Explorer
Basic dynamic load rating	C	1 354 kN
Basic static load rating	C_0	2 120 kN
Fatigue load limit	P_u	190 kN
Limiting speed		430 r/min
Limiting value	e	0.31
Calculation factor	Y_1	2.2
Calculation factor	Y_2	3.3
Calculation factor	Y_0	2.2

Tolerances of run-out

Range of section height at inner ring of assembled bearing	t_{Kia}	10 μm
Maximum run-out of inner ring side face to the bore	t_{Sd}	11 μm
Range of section height at outer ring of assembled bearing	t_{Kea}	18 μm
Perpendicularity of outer ring outside surface	t_{SD}	6.5 μm
ISO tolerance class for geoal tolerances		P5

Radial internal clearance

Minimum initial clearance	160 μm
Maximum initial clearance	220 μm

Tolerances of run-out

GENERAL BEARING SPECIFICATIONS

- Tolerances: Normal, P6, P5, tapered bore 1:12, tapered bore 1:30
- Radial internal clearance: cylindrical bore, tapered bore

BEARING INTERFACES

- Seat tolerances for standard conditions
- Tolerances and resultant fit

AGA BEARINGS